




Rear Indent Module (RIM) Upgrade Installation Instructions

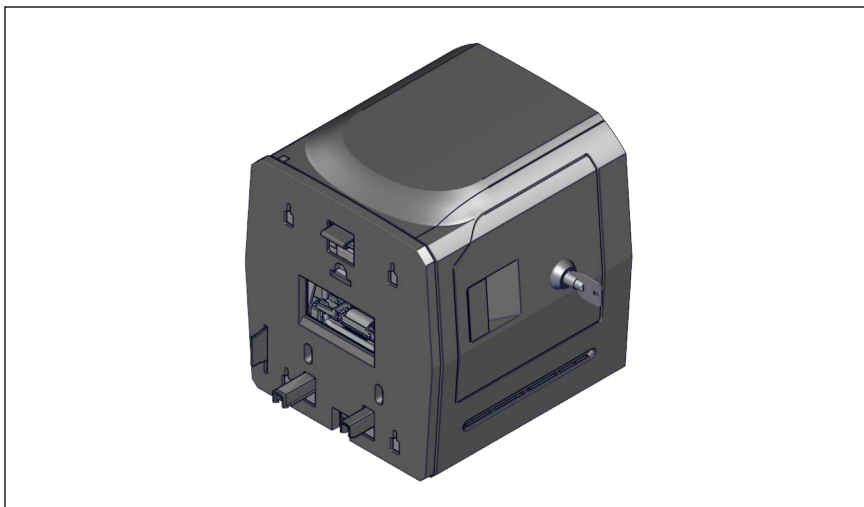

These instructions apply to the Entrust® Datacard® (formerly Sigma) DS4 Instant Issuance Printer and the following upgrade kits:

Upgrade Kit	DS4
Rear Indent Module (RIM) Upgrade Kit	Yes

Scan the QR code below or enter the web address to view the DS4 product support page and access support documents for the Rear Indent Module (RIM).




- RIM User's Guide
- RIM Warranty
- Translated Documents

entrust.com/ds4-support

Upgrade Kit Contents

The following parts are included in the upgrade kit:

Item	Qty.	Description
1	1	Rear Indent Module (RIM)
2	1	Power Supply
3	1	Power Cord
4	1	Lock Keys

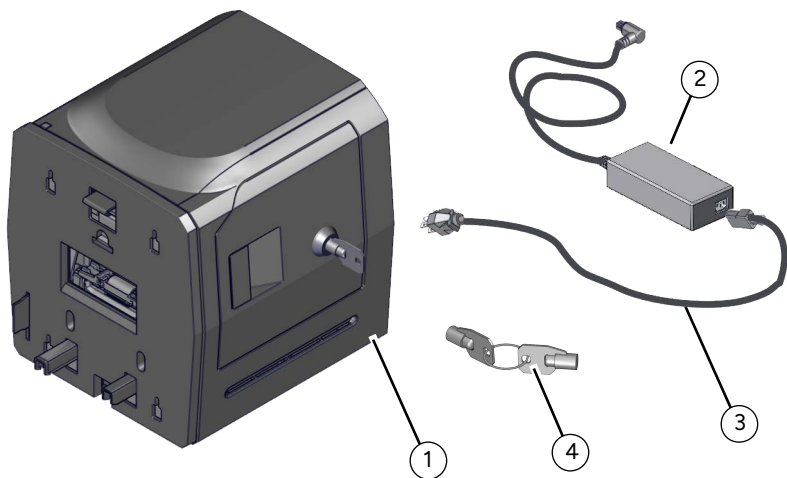

Installation Procedure


The installation of this upgrade kit adds a Rear Indent Module (RIM) to the DS4 Instant Financial Issuance System.




The Rear Indent Module (RIM) requires printer firmware version 4.2.1 or newer.
Make sure the printer firmware is updated before the installation of the RIM with the printer.

Install the Hardware

1. Press the power button to power down the printer.

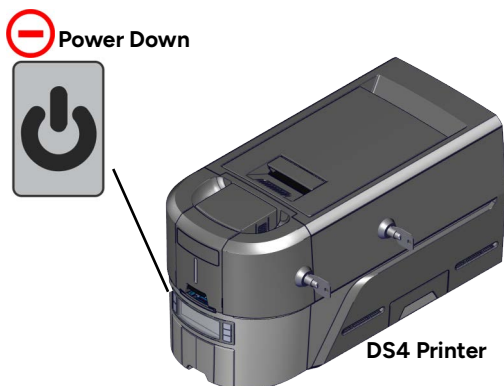

2. Unlock the RIM and open the side access door.


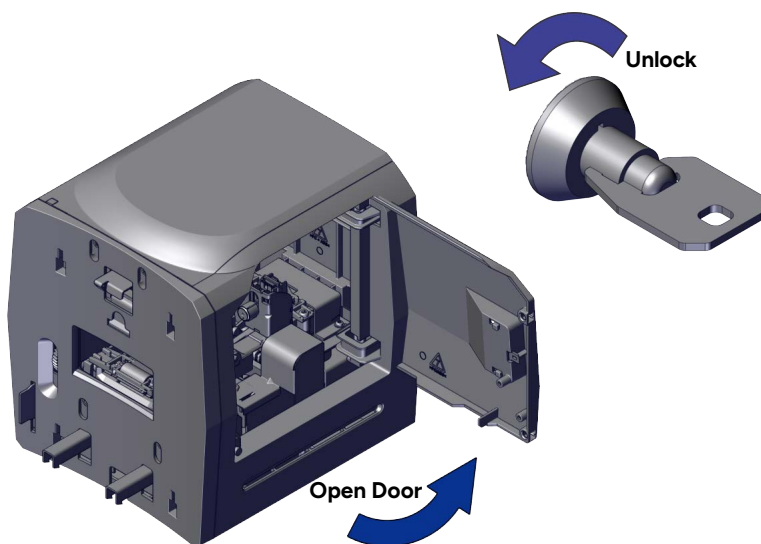


3. Remove the supply cassette from the shipping bag and position the cassette as shown.
4. Turn the left spool clockwise to remove any slack in the supply. Look into the cassette to ensure that the slack is removed from both spools and the ribbon.
5. Position and push in the supply cassette as shown to install it into the RIM.




Make sure the ribbon is installed under the anvil feature (a) located beneath the supply posts.


Make sure the supply cassette is secured under the clip (b) when installed.

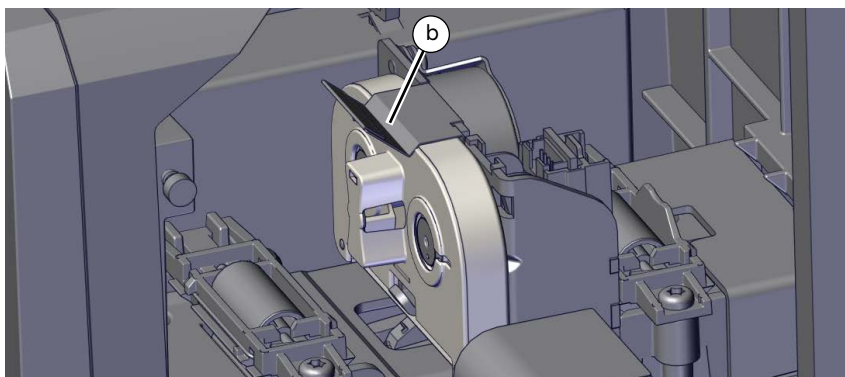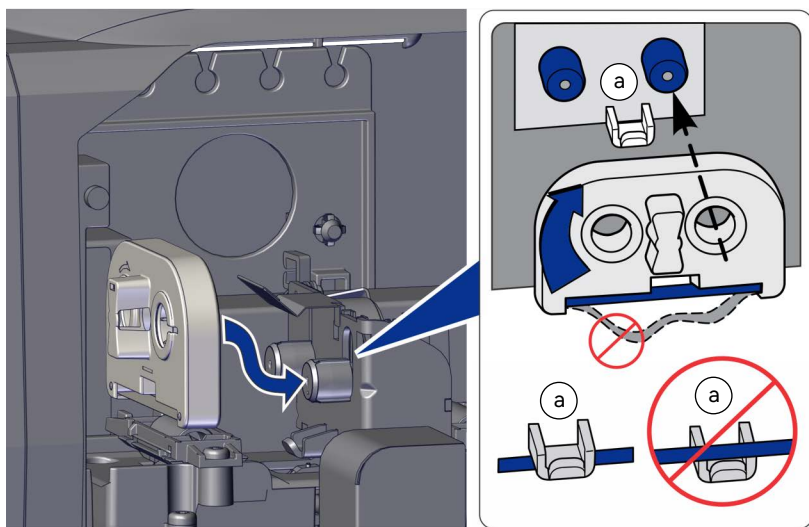


6. Close the side access door and lock the RIM.
7. Align the guide posts of the RIM with the openings at the rear base of the printer and push the module into the printer until an audible click confirms installation.

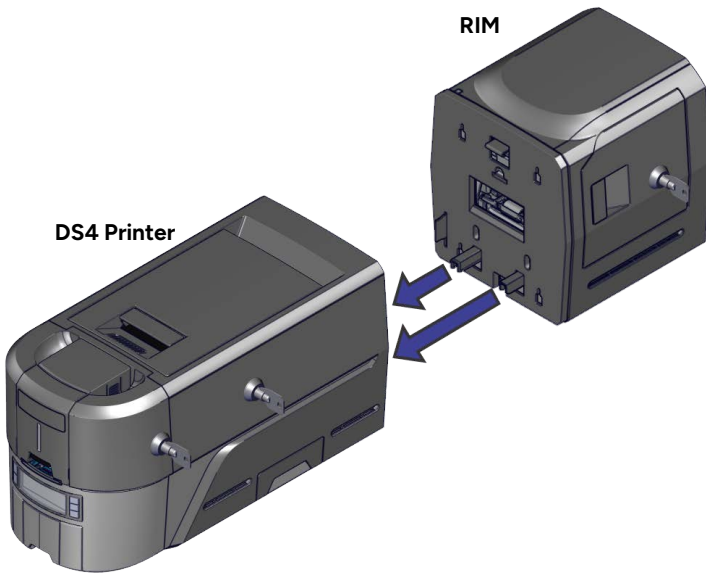


8. Plug the power supply into the RIM.

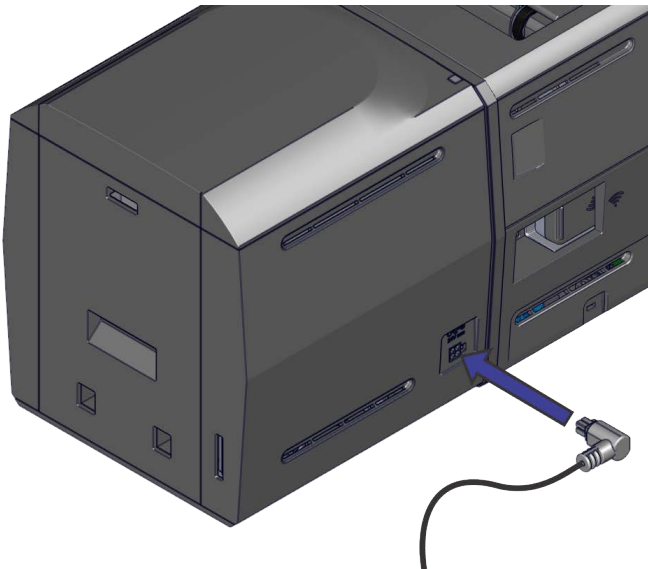

9. Plug the power cord into the power supply and the power source.

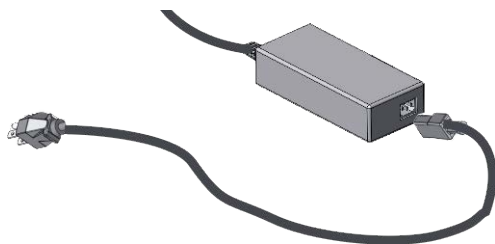

10. Press the power button and power on the printer. The status light on the RIM will turn green when ready.

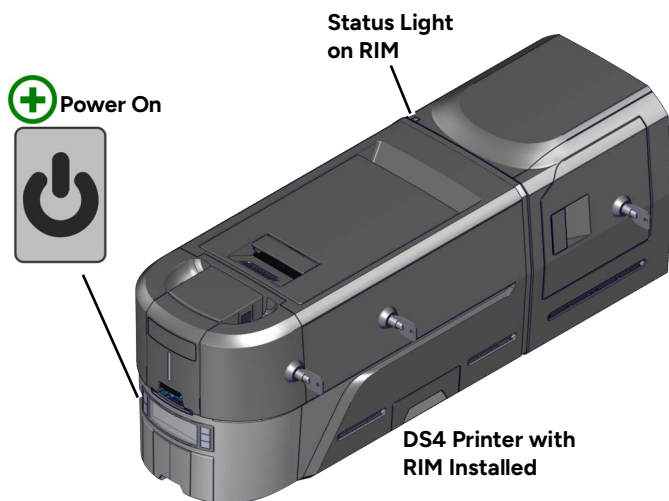

RoHS Table

Model: AX25

型号: AX25

Marketing names/销售名称

RIM (REAR INDENT MODULE)

有毒有害物质名称及含量的标识格式

零件名称 Part names		有毒有害物质或元素					
		铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
Power cord	电源线	o	o	o	o	o	o
Enclosure	机箱	o	o	o	o	o	o
Power Supplies	电源	o	o	o	o	o	o
Motors	电动机	o	o	o	o	o	o
Circuit Boards	线路板组件	o	o	o	o	o	o
Chassis	机架	o	o	o	o	o	o

本表格依据 SJ/T 11364 的规定编制

O = 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下 (indicates that the content of the toxic and hazardous substance in all the Homogeneous Materials of the part is below the concentration limit requirement as described in GB/T 26572).

X = 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求 (indicates that the content of the toxic and hazardous substance in at least one Homogeneous Material of the part exceeds the concentration limit requirement as described in GB/T 26572).

Safety and Compliance



Scan the QR code or access <https://www.entrust.com/legal-compliance/environmental-product-certifications> for:

- Declaration of Conformity
- Restriction of Hazardous Substances (RoHS)
- REACH Compliance
- Waste Electrical Electronic Equipment Directive (WEEE)
- Proposition 65 Compliance



ENTRUST

1187 Park Place
Minneapolis, MN 55379
952?933?1223 • Fax: 952?933?7971
www.entrust.com

California Proposition 65 Compliance

WARNING: This product contains chemicals, including lead, known to the State of California to cause cancer, and birth defects or other reproductive harm. ***Wash hands after handling.***



WARNING: This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer, and Di(2-ethylhexyl)phthalate (DEHP) and Butyl benzyl phthalate (BBP), which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov and <https://www.entrust.com/legal-compliance/environmental-product-certifications>.

Entrust, Datacard, Sigma, and the hexagon design are trademarks, registered trademarks and/or service marks of the Entrust Corporation in the United States and other countries.

All other product names are the property of their respective owners.

© 2026 Entrust Corporation. All rights reserved.